



P110*i* and P110*m* Card Printers



Zebra's Most Affordable Single-Sided Card Printers

For versatility and reliability in a compact frame, look no further than the Zebra P110*i* and P110*m* card printers. Ideal for space-constrained work areas and budgets, Zebra's P110*i* is the most versatile and cost-effective solution for your single-sided full colour card printing needs. For monochrome only applications, choose the P110*m* for a lower cost card printing alternative.



Ideal for:

- » Personalised credit/debit/ATM cards
- » Employee ID cards
- » Student and faculty ID cards
- » Access control cards
- » Membership and loyalty cards
- » Personalised gift cards
- » Visitor ID cards

Compact and Flexible

- » Small footprint easily fits into a wide range of locations
- » Weighs less than 10 pounds (4.3 kg)
- » Print full colour (P110*i*) or monochrome only (P110*m*)

Easy-to-Use

- » Intuitive design simplifies set-up and reduces training costs
- » LCD screen provides printer status and error messaging
- » Translucent card cover allows you to see when card supply is running low
- » Simple printhead replacement – no tools required!

Reliable Performance


- » Made with high strength plastics for high reliability and lower maintenance costs
- » Only printer in its class to offer comprehensive printer status and feedback on built-in LCD screen
- » Optional magnetic stripe encoding (HiCo/LoCo)

i Series™ Functionality

- » Automatic colour optimisation and driver configuration (P110*i* only)
- » Enhanced ribbon formulation for optimal colour output (P110*i* only)
- » Ribbon image counter and ribbon low notification (P110*i* only)

P110*m* Card Printer

The P110*m* is the most cost effective card printing solution for your monochrome printing applications.

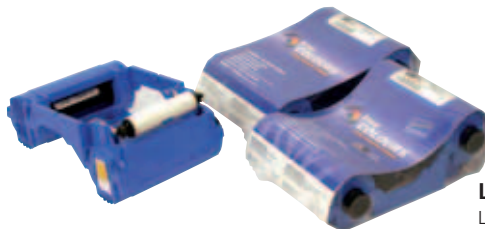

Load-N-Go™ Ribbon Cartridge

Load-N-Go ribbon cartridge with integrated card cleaning roller for easy ribbon replacement



P110i / P110m



Card Printers Product Specifications

General Specifications

- » Integrated card feeder
- » Load-N-Go™ drop-in ribbon cartridge
- » 16-character LCD display
- » Windows® driver for 2000 and XP (P110i, P110m); Server 2003® and Vista compatible (P110m)
- » Two year printer warranty
- » Two year (unlimited passes) original printhead warranty

Printing

- » Colour dye sublimation (P110i) or monochrome (P110i/P110m) thermal transfer printing
- » 300 dpi (11.8 dots/mm) print resolution
- » 30 seconds per card full colour, single-sided (YMCKO) P110i
- » 7.2 seconds per card monochrome, single-sided P110m

* Print speed based on average print coverage per card.

Bar Codes

- » Code 39, Code 128 B & C with & without check digit
- » 2 of 5 & 2 of 5 Interleaved
- » UPC-A, EAN 8 & EAN 13
- » PDF-417 2D bar code and other symbologies can be printed via Windows drivers

Card Specifications

- » Types: PVC, PVC Composite
- » Card width/length: ISO CR-80-ISO 7810, 2.12" (54mm) x 3.38" (86mm)
- » Magnetic Stripe-ISO 7811
- » Card thickness: 30 mil (.76mm)
- » Card feeder capacity: 100 cards (30 mil)
- » Card output hopper capacity: 45 cards (30 mil)

Communications Interface

- » USB 1.1 (USB 2.0 compatible) cable included
- » Optional built-in 10/100 Mbps Ethernet



Software drivers for the Zebra P110i and P110m Card Printers are tested to ensure that they meet Microsoft® standards for Windows® compatibility. Microsoft, Windows, and the Windows logo are trademarks, or registered trademarks of Microsoft Corporation in the United States and/or other countries.

Ribbon Specifications*

- » Load-N-Go™ ribbon cartridge with integrated card-cleaning roller
- » i Series™ intelligent ribbon technology
- » YMCKO: 200 cards/cartridge (P110i)
- » Monochrome: 1000 cards/cartridge black, blue, green, gold, red or silver.
850 cards/cartridge white



*for optimum printer performance use Genuine Zebra Supplies

Mechanical

- » Width: 7.9 in (201mm)
- » Depth: 12.9 in (328mm)
- » Height: 9.25 in (235mm)
- » Weight: 9.5 lbs (4.3kg)

Electrical

- » 100 ~ 240 Volts AC, 50 ~ 60 Hz (auto switching)
- » 8MB image memory standard
- » FCC Class A, CE, UL, CUL, and CCC approved

Environmental

- » Operating Temperature: 60°F to 86°F (15°C to 30°C)
- » Operating Humidity: 20% to 65% non-condensing
- » Storage Temperature: 23°F to 158°F (-5°C to 70°C)
- » Storage Humidity: 20% to 70% non-condensing
- » Ventilation: Free air

Options

- » Built-in 10/100 Mbps Ethernet
- » Magnetic encoder (30 mil cards only), 3 track HiCo/LoCo
- » CardSense™ single card-feed mode
- » Cleaning Kit (4 print engine and 4 feeder cleaning cards)

Genuine Zebra Supplies

- » Your choice of card printer supplies is critical. It is a primary factor affecting the reliability and consistency of printing. Genuine Zebra Supplies meet stringent quality standards and are tested for optimum performance with Zebra card printers.

www.zebracard.com



Zebra Technologies Corporation



ISO 9001
REGISTERED

An ISO 9001 registered company ©2006 ZIH Corp.
Specifications listed are for base model printers with standard features only unless otherwise noted. Specifications subject to change without notice. All product and brand names are trademarks of their respective companies. All rights reserved. All Copyrights, Trade and Service Marks shown or depicted herein are registered by their owners. No infringement is made for or implied by the use thereof.

Part No. P110i/P110m-02/08